


PRODUCT DATA SHEET

S/FTP double fully shielded twisted 4 pairs category 6E patch cord

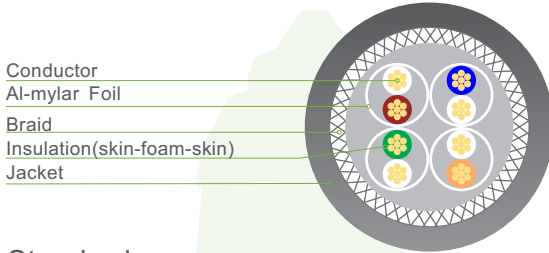

Standard

- Electrical performance guaranteed to meet or exceed ANSI/TIA-568.2-D Category 6E and ISO/EIC specifications.
- Independently tested and verified intertek(ETL).
- Ideal for Data center architectural requirements.
- Stranded cable for maximum flexibility.
- Available with different plug mold.
- Available with different color of cable.
- Available with different length.

Conductor

Conductor	Standed bare copper 26AWG
Insulation	PE(Foam-Skin)
Total number of insulated conductors	8, twisted in 4 pairs
Color code	blue x white, orange x white, green x white, brown x white
Individual pair shield	aluminum foil, providing 100% coverage, foil face out
Overall shield	Tinned copper braid
Drain wire	None

Order information (Part Number)
NTPC6E ___ STP

Available Length			Jacket Color			
01	02	03	BU	RD	WH	YL
05	07	10	GY	BK	GN	OR
15	25	50				

Special orders available upon request.

Nominal Transmission Characteristics

Res.	Length	Prop. Delay	Delay Skew	Freq.	Insertion Loss	NEXT	RL	ACR-N	ACR-F	PS NEXT	PS ACR-N	PS ACR-F
Ω	Max.	ns	ns	MHz	dB	dB	dB	dB	dB	dB	dB	dB
i	100m	550	50	1	3	65.0	19.0	62.0	63.3	62.0	59.0	60.3
				4	4.2	63.0	19.0	58.9	51.2	60.5	56.4	48.2
				8	5.8	58.2	19.0	52.4	45.2	55.6	49.8	42.2
				10	6.5	56.6	19.0	50.1	43.3	54.0	47.5	40.3
				16	8.2	53.2	18.0	45.0	39.2	50.6	42.4	36.2
				20	9.2	51.6	17.5	42.5	37.2	49.0	39.8	34.2
				25	10.2	50.0	17.0	39.8	35.3	47.3	37.1	32.3
				31.25	11.5	48.4	16.5	36.9	33.4	45.7	34.2	30.4
				62.5	16.4	43.4	14.0	27.0	27.3	40.6	24.2	24.3
				100	20.9	39.9	12.0	19.0	23.3	37.1	16.2	20.3
				200	30.1	34.8	9.0	4.7	17.2	31.9	1.8	14.2
				250	33.9	33.1	8.0	-0.8	15.3	30.2	-3.7	12.3
				350	40.6	30.3	6.6	-10.3	12.4	27.3	-13.3	9.4
				500	49.3	26.1	6.0	-23.2	9.3	23.2	-26.1	6.3

